

WATERPROOF LOW CONSUMPTION STRIP

CODE: BLR.125

Professional led strip.

With silicone sheath shockproof and insulated at the ends.

To improve heat dissipation it is recommended to mount the strips on our aluminium profiles.

Due to the high heat output, the strip must be mounted on a material with good thermal dissipation (eg metal); we recommend our aluminum PA Series profiles.

Bag package comprising:

- 5 m reel
- 2 power cable

12V



IP67

CRI 80



Features

- 3528 SMD Led - 60 LED/m
- Beam angle: 120°
- Minimum cutting section: 50 mm
- Extendible max: 5,000 mm
- Dimmable
- Colour rendering: >80
- Protection degree: IP67, for outdoor use
- Working temperature: -25 +60°C
- Storage temperature: -40 +80°C
- Rear adhesive 3M
- Material: copper 2 layer
- Substrate colour: white
- Average life: 25,000 hours
- Led operative life: L70B50

Technical data


	Article	Led colour	Colour temp.	Volt	Led type	Led/m	W/M	LM/M	LM/W	IP
	BLR.125.W	Bianco Freddo	6500°K	12V DC	3528 SMD	60	4,8	587	122	67
	BLR.125.D	Bianco Diurno	4000°K	12V DC	3528 SMD	60	4,8	250	52	67
	BLR.125.3W	Bianco Caldo	3000°K	12V DC	3528 SMD	60	4,8	544	113	67
	BLR.125.XW	Bianco Extra Caldo	2700°K	12V DC	3528 SMD	60	4,8	492	102	67

Accessori opzionali

ACCESSORIES FOR LED STRIPS	FLR.125.KIT
DRIVER AND DIMMER	LB.130, LB.700, LB.700.RF, SERIE SLB, NTG401, NTG400, VS3, RP2, MD1, CTR2021, CTR1032, CTR2032, SLV401, OMN400, CTR217
ALUMINUM PROFILES	PA.251, PA.261, PA.262, PA.272, PA.241, PA.243, PA.244, PA.245, PA.252, PA.253, PA.275, PA.276, PA.285, PA.287, PA.282, PA.283, PA.288, PA.1806, PA.221, PA.222, PA.351, PA.310, PA.362, PA.452, PA.416, PA.430, PA.440, PA.450, PA.460, PA.410, PA.420, PA.510, PA.520, PA.530, PA.768, PA.769, PA.781, PA.790, PA.284, PA.289, PA.417, PA.233, PA.658



Data sheets

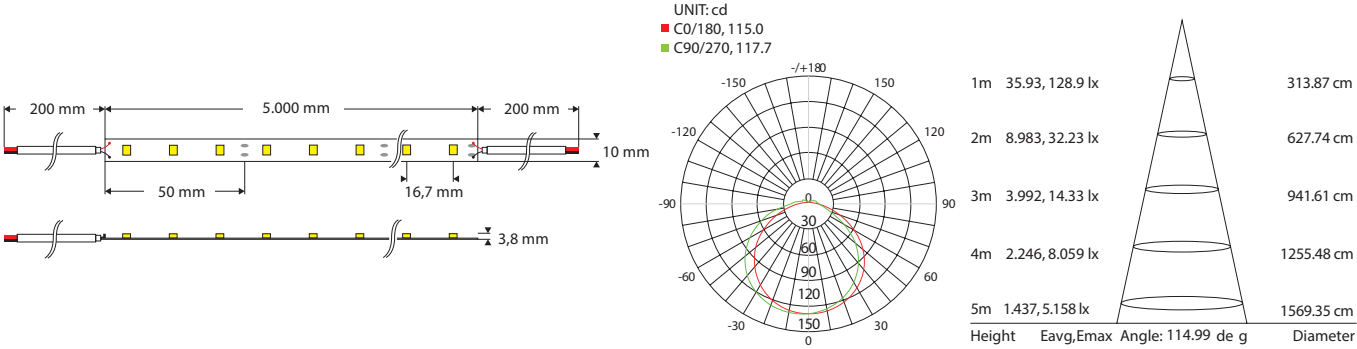



ENERG

LYVIALED

BLR.125.W

A

B

C

D

E

F

G

E

5

kWh/1000h



2019/2015



ENERG

LYVIALED

BLR.125.3W

A

B

C

D

E

F

G

E

5

kWh/1000h



2019/2015



ENERG

LYVIALED

BLR.125.XW

A

B

C

D

E

F

G

F

5

kWh/1000h



2019/2015