

RGB HIGH BRIGHTNESS STRIP

CODE: BLR.460.RGB

By using the special controller it is possible to change the colour of the strip, with different speeds and sequences

Due to the high heat output, the strip must be mounted on a material with good thermal dissipation (eg metal); we recommend our aluminum PA Series profiles.


Bag package comprising:

- 5 m reel
- 2 power cable

24V



IP20

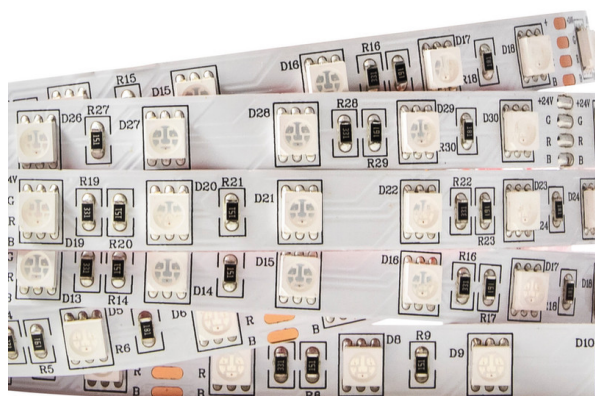

Features

- LED type SMD 5050 - 60 LED/m
- Beam angle: 120°
- Minimum cutting section: 100 mm
- Extendible max: 5,000 mm
- Dimmable
- Protection degree: IP20, for indoor use
- Working temperature: -25 +60°C
- Storage temperature: -40 +80°C
- Rear adhesive: 3M
- Material: copper 2 layer
- Substrate colour: white
- Average life: 30,000 hours
- Led operative life: L70B50

Technical data

Article	Led colour	Volt	Led type	Led/m	W/M	IP
BLR.460.RGB	RGB	24V DC	5050 SMD	60	14,4	20

Accessori opzionali

ACCESSORIES FOR LED STRIPS	CONNETTORI RAPIDI, FLR.122.PC.RGB, FLR.122.J.RGB
DRIVER AND DIMMER	LT.390, LB.700.RGB, LB.142, SERIE CD, CTR108, CTR103, CTR203, CTR208
ALUMINUM PROFILES	PA.251, PA.261, PA.262, PA.272, PA.241, PA.243, PA.244, PA.245, PA.252, PA.253, PA.275, PA.276, PA.285, PA.287, PA.282, PA.283, PA.288, PA.1806, PA.221, PA.222, PA.351, PA.310, PA.362, PA.452, PA.416, PA.430, PA.440, PA.450, PA.460, PA.410, PA.420, PA.510, PA.520, PA.530, PA.768, PA.769, PA.781, PA.790, PA.284, PA.289, PA.417, PA.233, PA.658



Data sheets

