

HIGH DENSITY STRIP

CODE: FLR.314

Professional led strip.

Due to the high heat output, the strip must be mounted on a material with good thermal dissipation (eg metal); we recommend our aluminum PA Series profiles.

Bag package comprising:

- 5m reels
- 1 power cord

24V



IP20

CRI 90 - TYP 94

COLORI VIVI



Features

- 3014 SMD Led - 140 LED/m
- Selected bin colour
- Beam angle: 120°
- Minimum cutting section: 100 mm
- Extendible max: 5,000 mm
- Dimmable
- Colour rendering: >90 - TYP 94
- Protection degree: IP20, for indoor use
- Working temperature: -20 +45°C
- Storage temperature: 0 +60°C
- Rear adhesive: 3M - 9080A
- Material: copper/polyamide 3 layer
- Substrate colour: white
- Average life: 65,000 hours
- Led operative life: L70B10

Technical data


	Article	Led colour	Colour temp.	Volt	Led type	Led/m	W/M	LM/M	LM/W	IP
	FLR.314.D	Bianco Diurno	4000°K	24V DC	3014 SMD	140	12,6	1500	119	20
	FLR.314.WW	Bianco Caldo	3000°K	24V DC	3014 SMD	140	12,6	1450	115	20
	FLR.314.XW	Bianco Extra Caldo	2700°K	24V DC	3014 SMD	140	12,6	1400	111	20

Accessori opzionali

ACCESSORIES FOR LED STRIPS	FLR.122.PC, FLR.180
DRIVER AND DIMMER	LB.700, LB.700.RF, NTG401, NTG400, VS3, RP2, SERIE CD, MD1, CTR2021, CTR1032, CTR2032, SLV401, OMN400, CTR217
ALUMINUM PROFILES	PA.251, PA.261, PA.262, PA.272, PA.241, PA.243, PA.244, PA.245, PA.252, PA.253, PA.275, PA.276, PA.285, PA.287, PA.282, PA.283, PA.288, PA.1806, PA.221, PA.222, PA.351, PA.310, PA.362, PA.452, PA.416, PA.430, PA.440, PA.450, PA.460, PA.410, PA.420, PA.510, PA.520, PA.530, PA.768, PA.769, PA.781, PA.790, PA.284, PA.289, PA.417, PA.233, PA.658



Data sheets

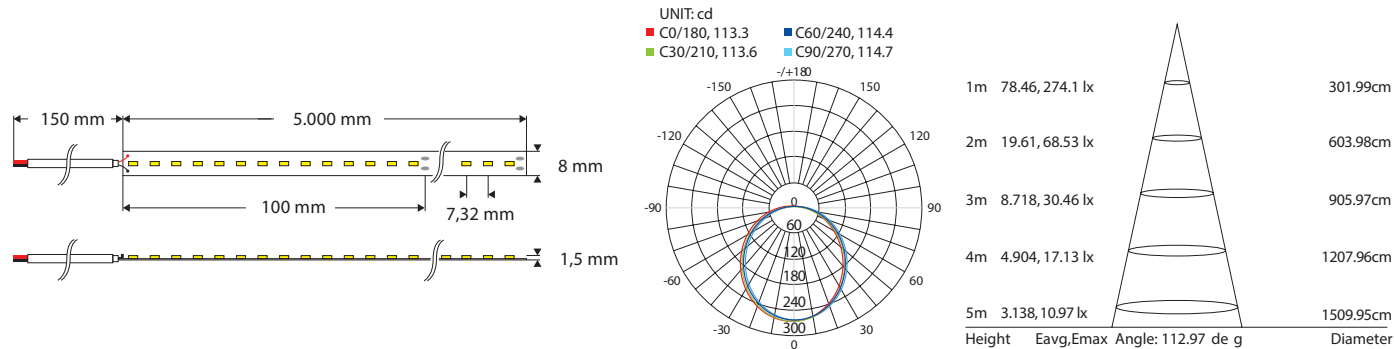



ENERG

LYVIALED

FLR.314.D



2

kWh/1000h



2019/2015



ENERG

LYVIALED

FLR.314.WW



2

kWh/1000h



2019/2015



ENERG

LYVIALED

FLR.314.XW

A

B

C

D

E

F

G

F

2

kWh/1000h



2019/2015