

HIGH LIGHT OUTPUT/LOW CONSUMPTION STRIP

CODE: FLR.365

Professional led strip.

Due to the high heat output, the strip must be mounted on a material with good thermal dissipation (eg metal); we recommend our aluminum PA Series profiles.

Bag package comprising:

- 5m reels
- 1 power cord

24V



IP20

CRI 90

COLORI VIVI



Features

- 2835 SMD Led - 128 LED/m
- Selected bin colour
- Beam angle: 120°
- Minimum cutting section: 62.5 mm
- Extendible max: 5,000 mm
- Dimmable
- Colour rendering: >90
- Protection degree: IP20, for indoor use
- Working temperature: -25 +45°C
- Storage temperature: 0 +60°C
- Rear adhesive: 3M
- Material: copper/polyamide 2 layer
- Substrate colour: white
- Average life: 30,000 hours
- Led operative life: L70B20

Technical data




	Article	Led colour	Colour temp.	Volt	Led type	Led/m	W/M	LM/M	LM/W	IP
	FLR.365.D	Bianco Diurno	4000°K	24V DC	2835 SMD	128	6,5	1095	168	20
	FLR.365.3W	Bianco Caldo	3000°K	24V DC	2835 SMD	128	6,5	950	146	20
	FLR.365.XW	Bianco Extra Caldo	2700°K	24V DC	2835 SMD	128	6,5	940	145	20

Accessori opzionali

ACCESSORIES FOR LED STRIPS	FLR.160.PC
DRIVER AND DIMMER	LB.700, LB.700.RF, NTG401, NTG400, VS3, RP2, SERIE CD, MD1, CTR2021, CTR1032, CTR2032, SLV401, OMN400, CTR217
ALUMINUM PROFILES	PA.251, PA.261, PA.262, PA.272, PA.241, PA.243, PA.244, PA.245, PA.252, PA.253, PA.275, PA.276, PA.285, PA.287, PA.282, PA.283, PA.288, PA.1806, PA.221, PA.222, PA.351, PA.310, PA.362, PA.452, PA.416, PA.430, PA.440, PA.450, PA.460, PA.410, PA.420, PA.510, PA.520, PA.530, PA.768, PA.769, PA.781, PA.790, PA.284, PA.289, PA.417, PA.233, PA.658



Data sheets

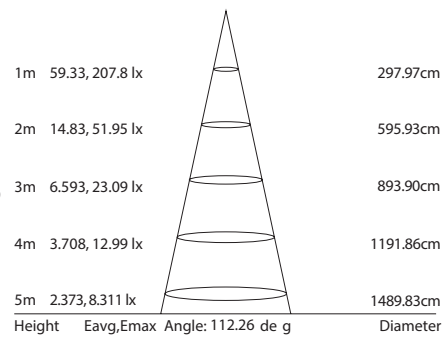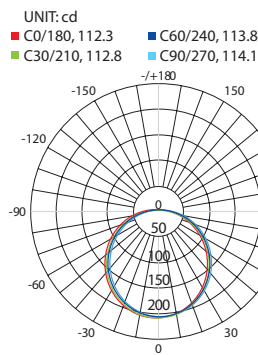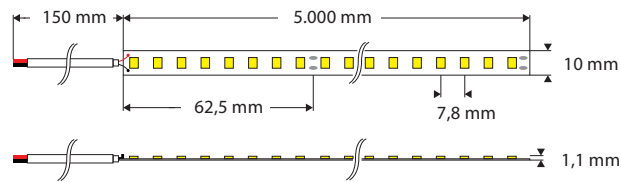



ENERG

LYVIALED

FLR.365.D

A

B

C

D

E

F

G

D

1

kWh/1000h



2019/2015



ENERG

LYVIALED

FLR.365.3W



1
kWh/1000h



2019/2015



ENERG

LYVIALED

FLR.365.XW



1

kWh/1000h



2019/2015