

DINAMIC WHITE HIGH BRIGHTNESS

CODE: FLR.619

Dynamic white flexible led strip

With this LED strip is possible to select in easy and fast way the desired white shade, from "warm" white 2,300°K to "cool" white 6,500°K, passing through intermediate colours. Bag package comprising:

- 5 m reel
- 1 power cable

24V



IP20

CRI 90

COLORI VIVI



Features

- 2016 SMD Led - 240 LED/m
- Beam angle: 120°
- Minimum cutting section: 50 mm
- Extendible max: 5,000 mm
- Dimmable
- Colour rendering: >90
- Protection degree: IP20, for indoor use
- Working temperature: -25 +45°C
- Storage temperature: -0 +60°C
- Rear adhesive: 3M - 9080A
- Material: copper 2 layer
- Substrate colour: white
- Average life: 40,000 hours @T55°C
- Vita operativa: L80B10

Technical data


	Article	Led colour	Colour temp.	Volt	Led type	Led/m	W/M	LM/M	LM/W	IP
	FLR.619	Bianco Dinamico	2.300°K - 6.500°K	24V DC	2016 SMD	240	19,2	1920	100	20

Accessori opzionali

ACCESSORIES FOR LED STRIPS	FLR.600.PC
DRIVER AND DIMMER	SERIE CD, CTR205, CTR2035
ALUMINUM PROFILES	PA.251, PA.272, PA.241, PA.243, PA.252, PA.253, PA.275, PA.276, PA.285, PA.287, PA.282, PA.283, PA.288, PA.221, PA.222, PA.351, PA.310, PA.362, PA.452, PA.416, PA.430, PA.440, PA.450, PA.460, PA.410, PA.420, PA.510, PA.520, PA.530, PA.768, PA.769, PA.781, PA.790, PA.284, PA.289, PA.417, PA.233, PA.658



Data sheets

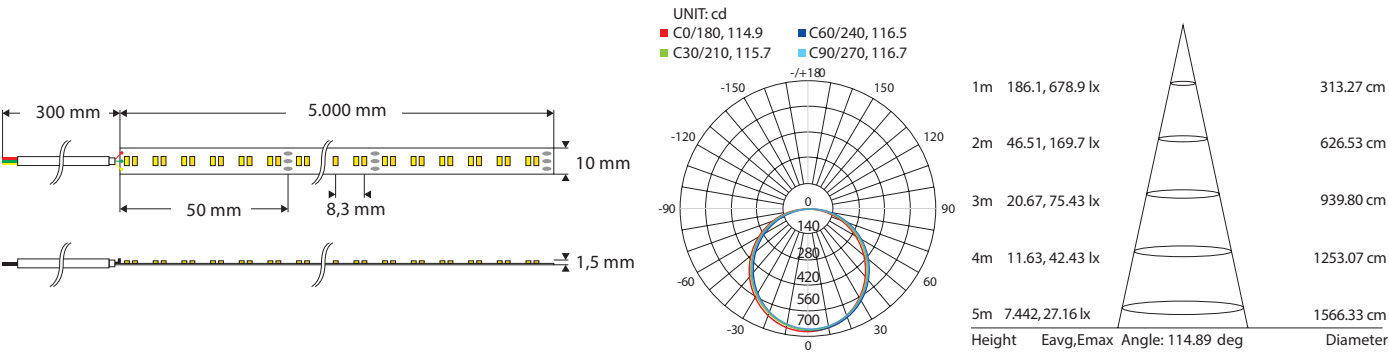



ENERG

LYVIALED

FLR.619



1

kWh/1000h



2019/2015