

WATERPROOF ULTRA-BRIGHT STRIP

CODE: BLR.459

Professional use led strip.

With transparent silicone sheath, tread resistant, shockproof.

Given the considerable heat production it is necessary mount the strip on material with good heat dissipation (e.g. metal), we recommend our aluminium profiles.

Bag package comprising:

- 5 m reel
- 2 power cable



Features

- 2835 SMD Led - 80 LED/m
- Selected bin colour
- Beam angle: 120°
- Minimum cutting section: 100 mm
- Extendible max: 5,000 mm
- Dimmable
- Colour rendering: >80
- Protection degree: IP54, for outdoor use
- Working temperature: -20 +40°C
- Storage temperature: -20 +80°C
- Rear adhesive: 3M
- Material: copper 2 layer
- Substrate colour: white
- Average life: 36,000 hours
- Led operative life: L70B50


Technical data

	Article	Led colour	Colour temp.	Volt	Led type	Led/m	W/M	LM/M	LM/W	IP
	BLR.459.D	Bianco Diurno	4.000°K	24V DC	2835 SMD	60	14,4	1.540	107	54
	BLR.459.3W	Bianco Caldo	3.000°K	24V DC	2835 SMD	60	14,4	1.500	104	54
	BLR.459.XW	Bianco Extra Caldo	2.700°K	24V DC	2835 SMD	60	14,4	1.195	83	54

Accessori opzionali

ACCESSORIES FOR LED STRIPS	FLR.150.KIT
DRIVER AND DIMMER	LB.430, LB.700, LB.700.RF, SERIE SLB, NTG401, NTG400, VS3, RP2, MD1, CTR2021, CTR1032, CTR2032, SLV401, OMN400, CTR217
ALUMINUM PROFILES	PA.251, PA.261, PA.262, PA.272, PA.241, PA.243, PA.244, PA.245, PA.252, PA.253, PA.275, PA.276, PA.285, PA.287, PA.282, PA.283, PA.288, PA.1806, PA.221, PA.222, PA.351, PA.310, PA.362, PA.452, PA.416, PA.430, PA.440, PA.450, PA.460, PA.410, PA.420, PA.510, PA.520, PA.530, PA.768, PA.769, PA.781, PA.790, PA.284, PA.289, PA.417, PA.233, PA.658

Data sheets

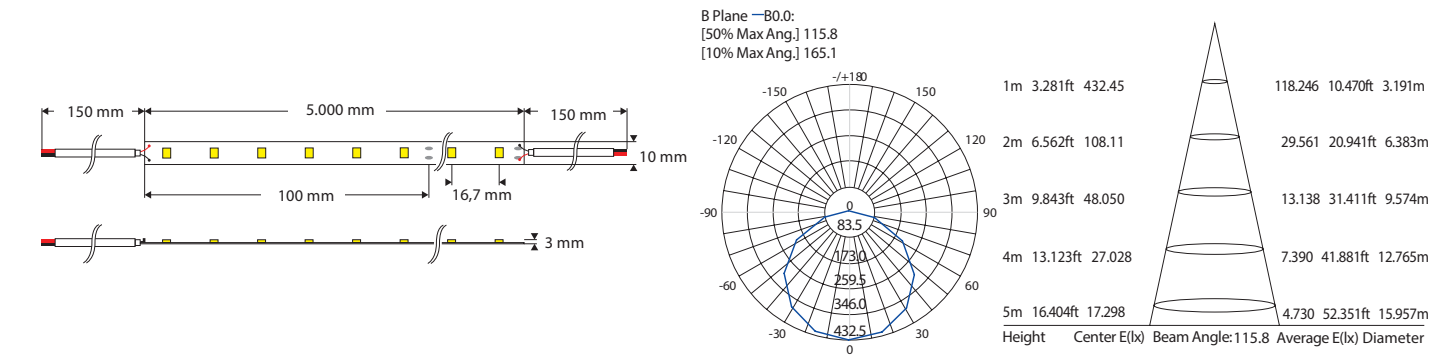



ENERG

LYVIALED

BLR.459.D



8

kWh/1000h



2019/2015



ENERG

LYVIALED

BLR.459.3W



8

kWh/1000h



2019/2015