


Dynamic white mini amplifier waterproof

CODE: CTR2035

It allows to synchronously replicate the PWM signal coming from the controller.

Suitable for outdoor mounting IP68

5-24V IP68

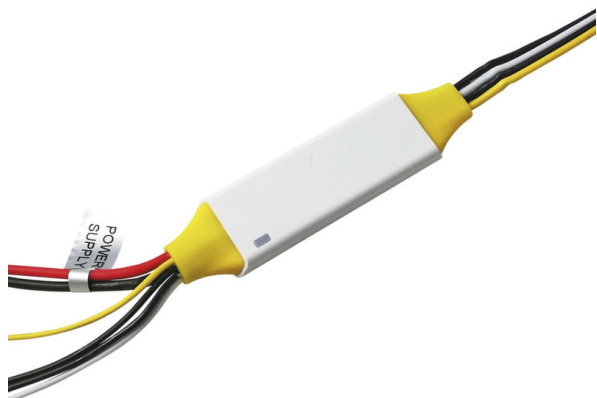

Features

- Output technology: constant voltage PWM
- Efficiency: > 97%
- Input voltage fluctuation: $\pm 3V$ of the power supply voltage
- Rising latency time: $< 3\mu\text{sec}$
- Downward latency time: $< 2\mu\text{sec}$
- Overload, short circuit, over temperature and reverse polarity protection
- Operating temperature: $-30^\circ\text{C} + 80^\circ\text{C}$
- IP68 for outdoor use
- Wire size: for AWG16 power supply, for AWG22 input, for AWG18 output

Technical data

Article	Protection degree	Volt	Max power	Current	Size (mm)	N. output
CTR2035	IP68	5-24V DC	336 (24V)	2x7A	87x21x8,5	2

Data sheets

