


STARRY LED mini square Led downlight

CODE: STQ

• Ideal for creating effects "starry sky", for atmosphere lights in rooms, corridors, hotels, commonplaces and houses
• Suitable for ceiling mounting or recessed housing wall or floor



- Round head
- Stainless steel body
- 1 high brightness white LED
- Powered by constant current power supply
- Voltage: 3÷3,4 V c.c. - 300 mA
- Color rendering: >80
- Luminous efficiency: 80 lm / w
- Protection degree: IP44
- Cables L = 20 cm
- Dimensions: 20x20x26 mm
- Ø hole in ceiling: 19 mm
- Weight: 17 gr

A++

IP44


CRI 80

Technical data


Article	Description	Dimensions	Total consumption	Protection degree	Color	Luminous flux	Angle of diffusion
STQ.W4	corpo verniciato bianco	20X20x26 mm	1W	IP44	day light 4.000°K	70 lm	60°
STQ.W3	corpo verniciato bianco	20X20x26 mm	1W	IP44	warm white 3.000°K	60 lm	60°
STQ.K4	corpo cromato	20X20x26 mm	1W	IP44	day light 4.000°K	70 lm	60°
STQ.K3	corpo cromato	20X20x26 mm	1W	IP44	warm white 3.000°K	60 lm	60°

Data sheets


Dime di foratura



Altezza installazione

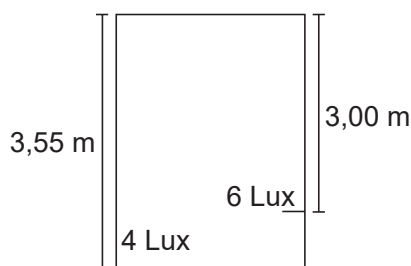

Schema di collegamento

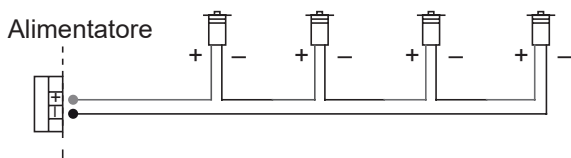

Cabinets and recessed

