



Ultra thin Led downlight for ceiling

CODE: SLIM SQUARE

Innovative panels ultrathin compact design.

They fit perfectly in any type of installation recessed and, thanks to the extremely small thickness, can also be used with extremely low ceilings.

- Can be used as an alternative to equipment with fluorescent lamps 60W and 80W
- Complete with separate power supply from the lamp
- Antiglare satin methacrylate diffuser
- Aluminium white painted body
- Power supply: 220-240V ~ 50 / 60Hz
- Color rendering index: > 80
- Luminous efficiency: 75 lm / W
- Power factor: > 0.8
- Average life: 25,000 hours
- Working temperature: -20 ° C + 40 ° C
- Insulation class: II
- Protection degree: IP20





IP20 CRI 80

Technical data

Article	Dimensions	Total consumption	Color	Luminous flux	Angle of diffusion
SQ12.D	170x170x22mm	12W	day light 4.000°K	900 lm	120°
SQ12.WW	170x170x22mm	12W	warm white 3.000°K	900 lm	120°
SQ18.WW	225x225x22mm	18W	warm white 3.000°K	1500 lm	120°

Data sheets

FORO IN CONTROSOFFITTO

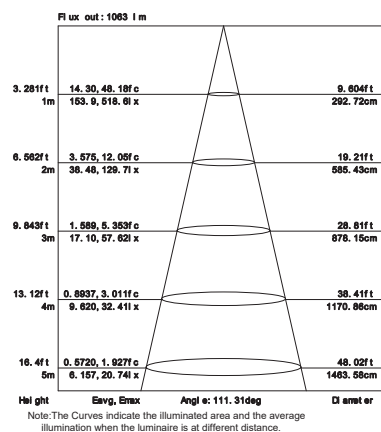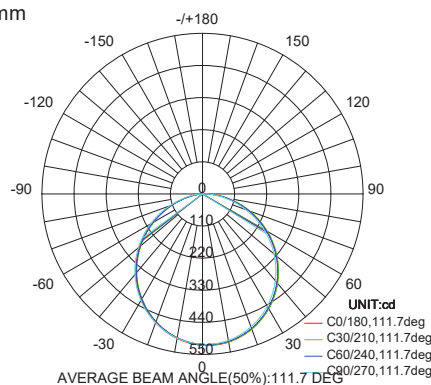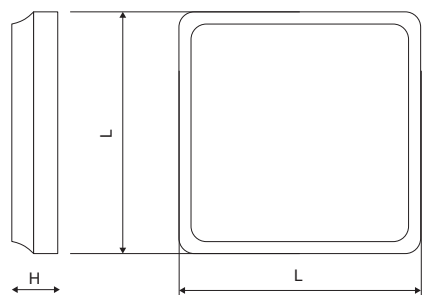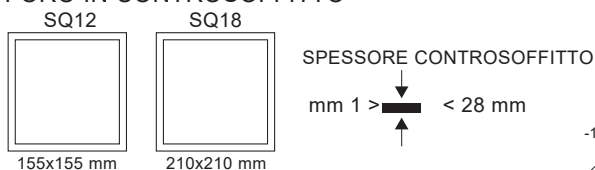

Cabinets and recessed

