

Led round ceiling lamp emergency

CODE: LUNA AID

Round ceiling lamps with LED technology.
Waterproof, for outdoor use.
With circuit and battery for automatic intervention in case of blackout.
Can be installed both ceiling and wall.
Round cabinets with integrated plate with high luminous LEDS for a uniform diffusion of light on the entire surface.
Body and diffuser in white high resistance polycarbonate.
Equipped with rear bracket for wall mounting.
Working: SA-SE. Provided with breakable hole for Ø 16 mm tube.

A++

IP66

CRI 80




Features

- Power supply: 230V ~ 50Hz
- Colour rendering: > 80
- Power factor: > 0.7
- Average life: 30,000 hours
- Operating temperature: -20°C +40°C
- Insulation class: II
- Beam angle: 120°
- Protection degree: IP66, for outdoor use
- Non dimmable
- Ni-Cd buffer battery: 6V - 1,5 Ah rechargeable
- Average charging time: 24 hours
- Average intervention time: 1 sec
- Shockproof: IK10
- Battery protection circuit

Technical data

Article	Dimensions	Total consumption	Color	Luminous flux	Angle of diffusion	Weight
LNE15.D	Ø 300 x 95 mm	15 W	day light 4.000°K	1.050 lm	120°	1.190 gr
LNE15.WW	Ø 300 x 95 mm	15 W	warm white 3.000°K	1.000 lm	120°	1.190 gr
LNE25.D	Ø 360 x 105 mm	25 W	day light 4.000°K	1.900 lm	120°	1.590 gr
LNE.25.WW	Ø 360 x 105 mm	25 W	warm white 3.000°K	1.800 lm	120°	1.590 gr

Data sheets

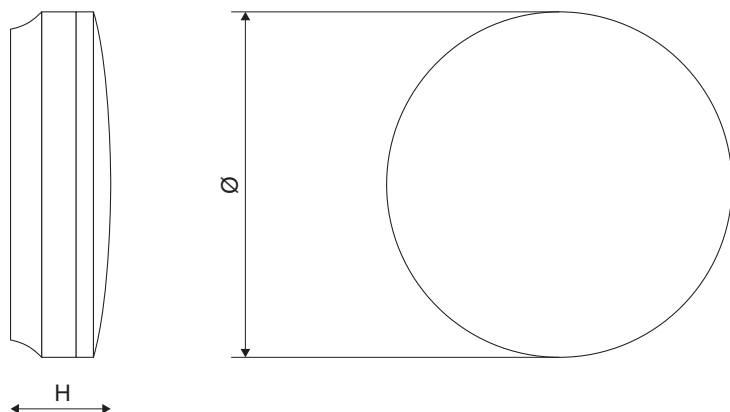

Cabinets and recessed

