

Waterproof lighting appliance

CODE: BAYLITE 200W

- Ideal to be installed in suspension at ceiling, at wall, at floor (with adjustable supports optional item n. BTB)
- Body in die-cast aluminum
- Led SMD Philips 3030
- Polycarbonate diffuser, with lens to augment luminous flux
- Waterproof driver Meanwell

A++

IP65

CRI 80






Features

- Power supply: 110-270V
- Frequency: 50/60Hz
- Colour temperature: 4000°K
- Colour rendering: >80
- Luminous efficiency: 115 lm/W
- Power factor: >0,9
- Protection degree: IP65, for outdoor use
- Average life: 35,000 hours
- Led operating life: L70B10 @ 142.000 hours
- Working Temperature: -20°C +50°C
- Shockproof: IK06
- With kit for suspension

Technical data

Article	Dimensions	Total consumption	Color	Luminous flux	Angle of diffusion	Weight
BT200	1217 x 135 x 92 mm	200 W	day light 4.000°K	23.000 lm	30-70°	8 kg
BTA200	1217 x 135 x 92 mm	200 W	day light 4.000°K	23.000 lm	60-100°	8 kg

Data sheets

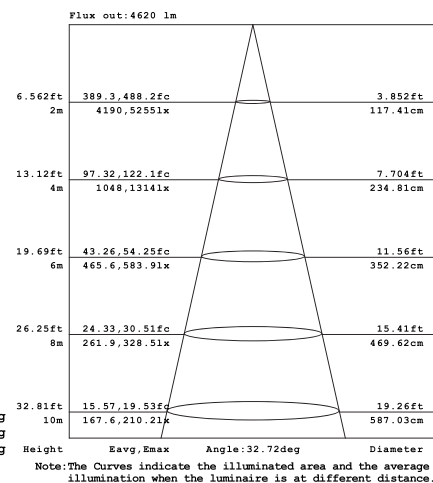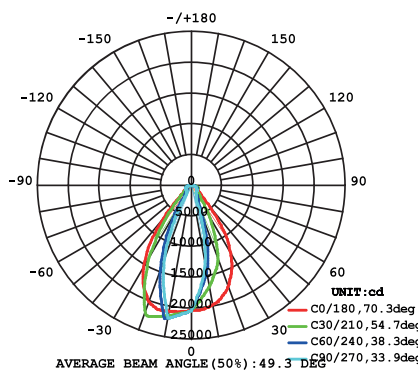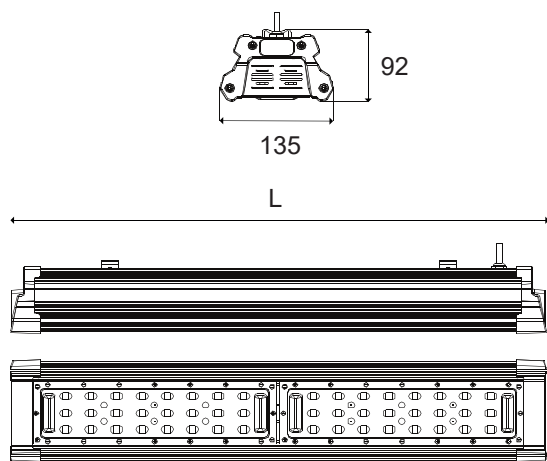

Appliance for outdoor

