


THERMAL CONTROL STRIP

CODE: FLR.812

Special IC on the circuit provide an automatic thermal control, no need to use with profiles.

Bag package comprising:

- 5 m reel
- 1 power cable

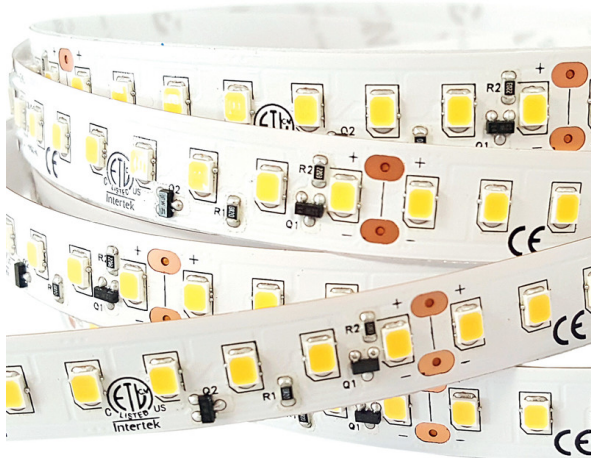

Features


- 2835 SMD Led - 128 LED/m
- Selected bin colour
- Beam angle: 120°
- Minimum cutting section: 62.5 mm
- Extendible max: 5,000 mm
- Dimmable
- Colour rendering: >90
- Protection degree: IP20, for indoor use
- Working temperature: -20 +45°C
- Storage temperature: 0 +60°C
- Rear adhesive: 3M - 9080A
- Material: copper/polyamide 2 layer
- Substrate colour: white
- Average life: 40,000 hours @T55°C
- Vita operativa: L80B10

Technical data


	Article	Led colour	Colour temp.	Volt	Led type	Led/m	W/M	LM/M	LM/W	IP
	FLR.812.D	Bianco Diurno	4000°K	24V DC	2835 SMD	128	23	3200	139	20
	FLR.812.WW	Bianco Caldo	3000°K	24V DC	2835 SMD	128	23	3000	130	20

Accessori opzionali

ACCESSORIES FOR LED STRIPS	FLR.160.PC
DRIVER AND DIMMER	LB.700, LB.700.RF, NTG401, NTG400, VS3, RP2, SERIE CD, MD1, CTR2021, CTR1032, CTR2032, SLV401, OMN400, CTR217



Data sheets

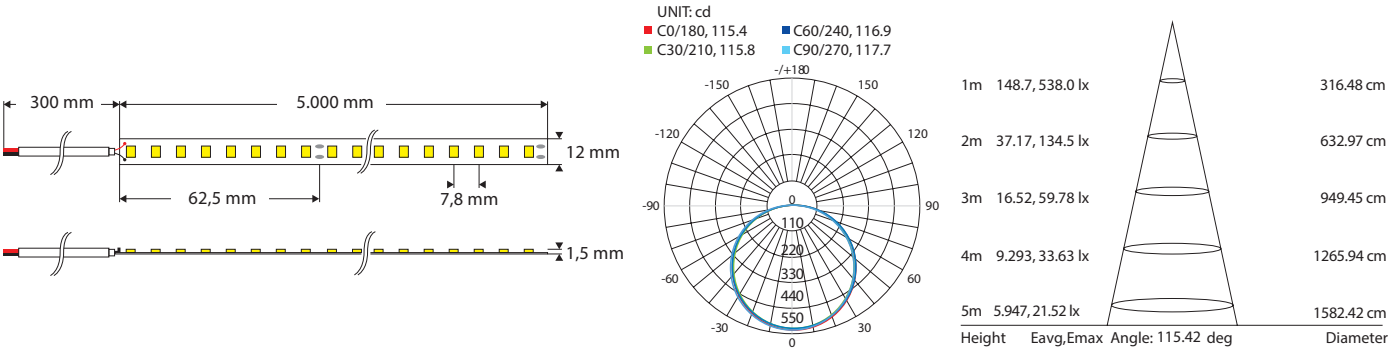



ENERG

LYVIALED

FLR.812.D



2
kWh/1000h



2019/2015



ENERG

LYVIALED

FLR.812.WW



2

kWh/1000h



2019/2015