Arteleta International S.p.A.
Via Pellizza da Volpedo 57 - 20092 Cinisello Balsamo (MI) - ITALY
Tel: +39.02.66013541 - Fax: +39.02.6122573



XXLED STRIP 20M

CODE: **FLR.912**

Only 1 reel... 20m ilight!
Professional led strip.
Due to the high heat output, the strip must be mounted on a material with good thermal dissipation (eg metal); we recommend our aluminum PA Series profiles.
Bag package comprising: • 20m reels
• 2 power cord

24V IP20 CRI 80

Features

- 2835 SMD Led - 120 LED/m
- Selected bin colour
- Beam angle: 120°
- Minimum cutting section: 50 mm
- Extendible max: 20,000 mm
- Dimmable
- Colour rendering: >80
- Protection degree: IP20, for indoor use
- Working temperature: -20 +45°C
- Storage temperature: 0 +60°C
- Rear adhesive: 3M
- Material: copper/polyamide 2 layer
- Substrate colour: white
- Average life: 40,000 hours @T55°C
- Led operative life: L80B10

Technical data

Article	Led colour	Colour temp.	Volt	Led type	Led/m	W/M	LM/M	LM/W	IP
FLR.912.W	Bianco Freddo	6000°K	24V DC	2835 SMD	120	14,4	1720	119	20

ACCESSORIES FOR LED STRIPS	FLR.160.PC
DRIVER AND DIMMER	LB.700, LB.700.RF, NTG401, NTG400, VS3, RP2, SERIE CD, MD1, CTR2021, CTR1032, CTR2032, SLV401, CTR217, OMN400
ALUMINUM PROFILES	PA.251, PA.261, PA.262, PA.272, PA.253, PA.275, PA.276, PA.285, PA.287, PA.282, PA.288, PA.1806, PA.221, PA.222, PA.351, PA.310, PA.362, PA.452, PA.416, PA.430, PA.440, PA.450, PA.460, PA.410, PA.420, PA.510, PA.520, PA.530, PA.768, PA.781, PA.790, PA.284, PA.289, PA.417, PA.233, PA.658

Data sheets

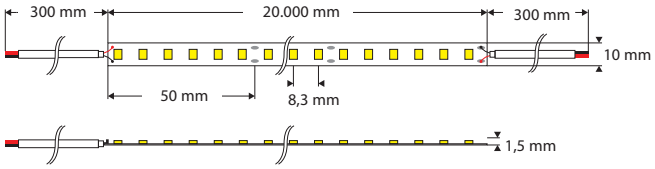
300 mm
20.000 mm
300 mm
10 mm
50 mm
8,3 mm
1,5 mm

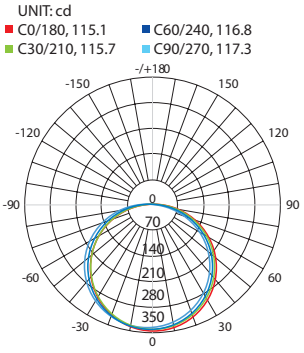
UNIT: cd
C0/180, 115.1
C60/240, 116.8
C30/210, 115.7
C90/270, 117.3
-/+180
-150
150
-120
120
-90
90
-60
60
-30
30
0
0
70
140
210
280
350

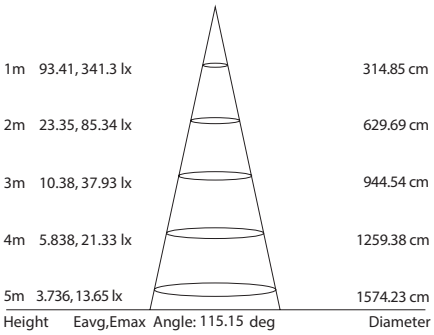
1m 93.41, 341.3 lx
314.85 cm
2m 23.35, 85.34 lx
629.69 cm
3m 10.38, 37.93 lx
944.54 cm
4m 5.838, 21.33 lx
1259.38 cm
5m 3.736, 13.65 lx
1574.23 cm
Height
Eavg,Emax
Angle: 115.15 deg
Diameter