



## Led squared ceiling lamp

### CODE: TRITONQ

Squared ceiling lamps with LED technology.

Innovative technology "colour change" allows to select desire colour temperature (3000 - 4000 - 5700°K).

The essential design and "minimal" lines allow a very wide use of these ceiling lamps, which can be installed on the ceiling or wall.

Plate with high luminous LEDs for a uniform diffusion of light on the entire surface.

White polycarbonate body with high mechanical resistance.

High diffusion satin diffuser in polycarbonate.

"No Flicker" IC integrated driver.

Equipped with rear bracket for wall mounting.

Junction box for electrical connections.

Change colour selector.

**IP54** CRI 80


## Features

- Power supply: 230V ~ 50Hz
- Colour rendering: >80
- Luminous efficiency: 120 lm/W
- Power factor: >0.5
- Average life: 30,000 hours
- Operating temperature: -20°C + +40°C
- Insulation class: II
- Beam angle: 120°
- Protection degree: IP54, for outdoor use
- Shockproof: IK08
- Photo-biological safety: RG 0

## Technical data

Article	Dimensions	Total consumption	Protection degree	Color	Luminous flux	Angle of diffusion
TQ22	220 x 220 x 50 mm	12W	IP54	3000-4000-5700°K	1.350 lm	120°
TQ28	280 x 280 x 50 mm	18W	IP54	3000-4000-5700°K	2.100 lm	120°
TQ33	330 x 330 x 50 mm	24W	IP54	3000-4000-5700°K	2.900 lm	120°

## Data sheets

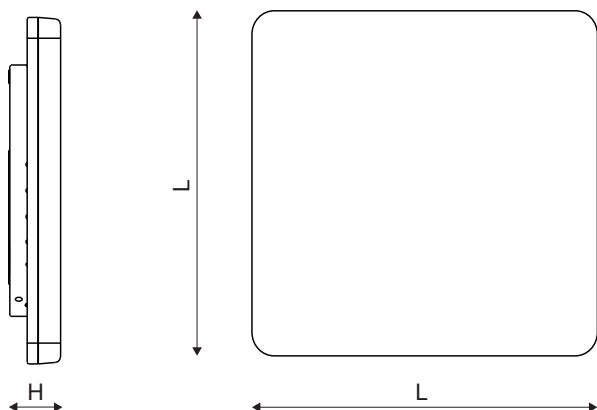

Cabinets and recessed

