

HIGH BRIGHTNESS STRIP

CODE: BLR.468

Led strip for professional use.

Given the considerable heat production it is necessary to mount the strip on material with good heat dissipation (e.g. metal); we recommend our aluminium profiles.

Bag package comprising: • 5 m reel
• 2 power cable

24V



IP20

CRI 80



Features

- SMD 2835 type LED - 60 LED / m
- Bin color selected
- Beam angle: 120 °
- Minimum cutting section: 100 mm
- Extendable max: 5.000 mm
- Dimmable
- Color rendering: > 80
- Protection degree: IP20, for indoor use

- Operating temperature: -20 + 40 ° C
- Storage temperature: -20 + 80 ° C
- Rear adhesive: 3M
- Material: 2-layer copper
- Substrate color: white
- Average life: 30,000 hours
- Led operative: L70B20

Technical data


	Article	Led colour	Colour temp.	Volt	Led type	Led/m	W/M	LM/M	LM/W	IP
	BLR.468.W	Bianco Freddo	6.500°K	24V DC	2835 SMD	60	14,4	1.265	87	20
	BLR.468.D	Bianco Diurno	4.000°K	24V DC	2835 SMD	60	14,4	1.200	83	20
	BLR.468.3W	Bianco Caldo	3.000°K	24V DC	2835 SMD	60	14,4	1.100	76	20
	BLR.468.XW	Bianco Extra Caldo	2.700°K	24V DC	2835 SMD	60	14,4	1.168	81	20

Accessori opzionali

ACCESSORIES FOR LED STRIPS	CONNETTORI RAPIDI, FLR.160.PC
DRIVER AND DIMMER	LB.700, LB.700.RF, NTG401, NTG400, VS3, RP2, SERIE CD, MD1, CTR2021, CTR1032, CTR2032, SLV401, OMN400, CTR217
ALUMINUM PROFILES	PA.251, PA.261, PA.262, PA.272, PA.241, PA.243, PA.244, PA.245, PA.252, PA.253, PA.275, PA.276, PA.285, PA.287, PA.282, PA.283, PA.288, PA.1806, PA.221, PA.222, PA.351, PA.310, PA.362, PA.452, PA.416, PA.430, PA.440, PA.450, PA.460, PA.410, PA.420, PA.510, PA.520, PA.530, PA.768, PA.769, PA.781, PA.790, PA.284, PA.289, PA.417, PA.233, PA.658



Data sheets

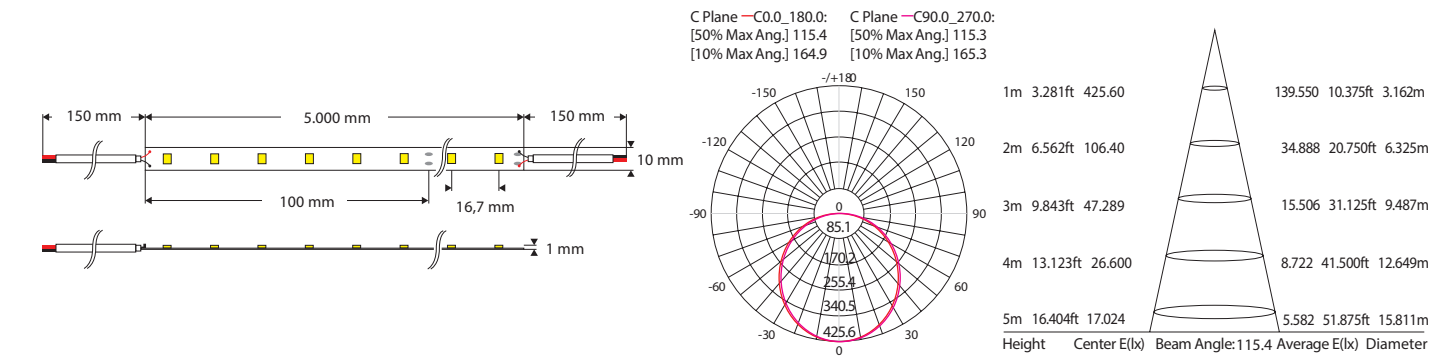



ENERG

LYVIALED

BLR.468.D



2
kWh/1000h



2019/2015



ENERG

LYVIALED

BLR.468.3W



2
kWh/1000h



2019/2015



ENERG

LYVIALED

BLR.468.XW

A

B

C

D

E

F

G

G

2

kWh/1000h



2019/2015