


Mini amplifier RGB IP68

CODE: CTR203

Mini amplifiers for LED strips, able to synchronously repeat the signal in PWM technology.

Extremely compact construction and suitable for outdoor mounting IP68.

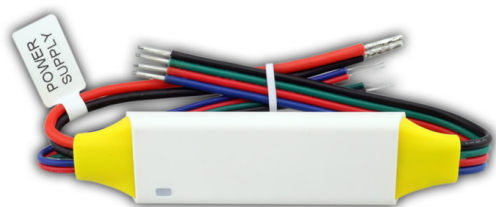

5-24V IP68

Features

- Output technology: constant voltage PWM
- Efficiency: > 97%
- Input voltage fluctuation: $\pm 3V$ of the power supply voltage
- Rising latency time: <4 μ sec
- Downward latency time: <3 μ sec
- Overload, short circuit, over temperature and reverse polarity protection
- IP68, for outdoor use
- Operating temperature: -30 °C + 60 °C
- Wire size: for AWG16 power supply, for AWG22 input, for AWG18 output

Technical data

Article	Protection degree	Volt	Max power	Current	Size (mm)	N. output
CTR203	IP68	5-24V DC	360 W (24 V)	3x5 A	87x21x8,5	3

Data sheets

