

Led projectors

CODE: CHANGE POWER




- Symmetrical optics
- Die-cast aluminum body, anti-scratch finish, black color, excellent corrosion resistance
- High efficiency reflector, maximizes light output
- Anti-glare tempered glass
- Wall fixing bracket, 360 ° adjustable
- Operating voltage: 220V - 260V - 50Hz
- Power supply compartment on board
- Color rendering: >80
- LED luminous efficiency: 110 lm / W
- Power factor: > 0,9
- Led operating life: L80B10
- Average life: 40.000 hours
- Operating temperature: -25 ° C +45 ° C
- IP65, for outdoor use
- Shockproof IK08
- Driver with DOB technology

IP65 CRI 80

Technical data

Article	Dimension (AxBxC)	Body color	Total consumption	Color	Luminous flux	Angle of diffusion	Weight
XC100	240 x 335 x 57 mm	black	100 W	day light 4.000°K	11.000	120°	2,025 kg
XC150	295 x 395 x 60 mm	black	150 W	day light 4.000°K	16.500	120°	2,873 kg
XC200	295 x 395 x 60 mm	black	200 W	day light 4.000°K	22.000	120°	2,873 kg

Data sheets

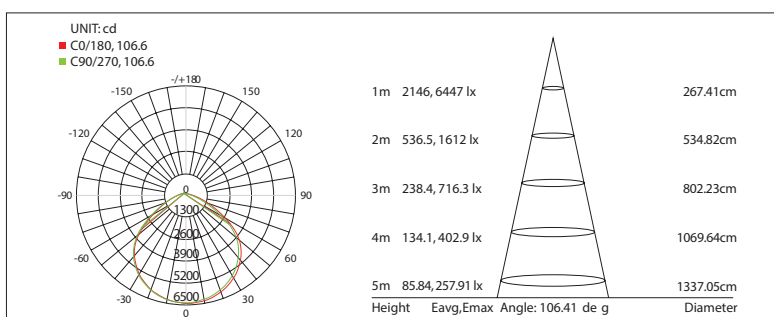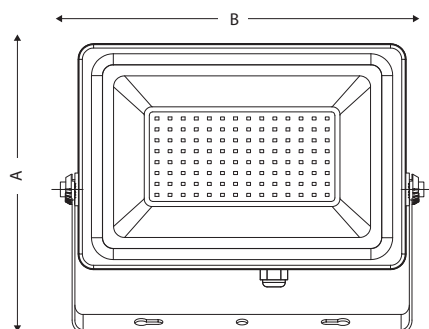

Appliance for outdoor

