

## HIGH BRIGHTNESS LED STRIP


CODE: FLR.419

Professional led strip.

Due to the high heat output, the strip must be mounted on a material with good thermal dissipation (eg metal); we recommend our aluminum PA Series profiles.

Bag package comprising:

- 10m reels
- 1 power cord

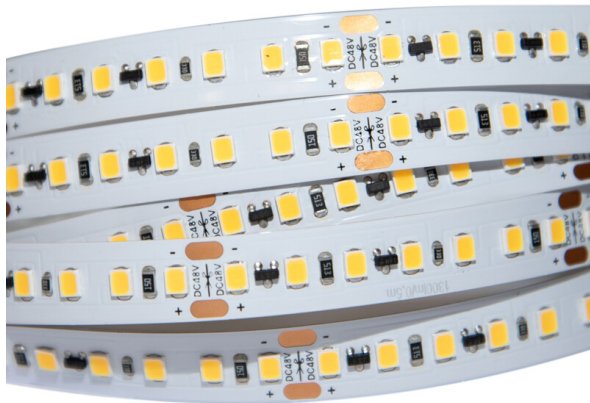

48V



IP20

CRI 90



COLORI VIVI



### Features

- Flexible: adapts easily to surfaces
- For internal use IP20
- Sectionable: every 7 LEDs (50mm) can be cut and re-powered
- Adhesive: thanks to the 3M adhesive on the back
- LED type SMD 2835 - 140 LED/m
- Consumption (Pon): 19.2 W/m
- Diffusion angle: 120°
- Dimmable
- Power supply: 48V constant voltage
- Maximum plug-in length: 10m
- LED life: 54,000 hours @T65°C L70B50
- Size: 10 x 1.5mm
- Storage temperature: -30 +80°C
- Operating temperature: -20 +50°C

### Technical data

	Article	Led colour	Colour temp.	Volt	Led type	Led/m	W/M	LM/M	IP
	FLR.419.D	bianco diurno	4000°K	48V	2835 SMD	140	19,2 W/m	2900	20
	FLR.419.3W	bianco caldo	3000°K	48V	2835 SMD	140	19,2 W/m	2850	20





# ENERG

## LYVIALED

### FLR.419.D

---



---

**10**  
kWh/1000h



2019/2015



# ENERG

## LYVIALED

### FLR.419.3W

---



---

**10**  
kWh/1000h



2019/2015