


DYNAMIC WHITE LED STRIP - FREE CUT

CODE: **FLR.620**

FREE CUT: every single LED chip (6mm) can be sectioned and every 2 LED chips (12mm) can be re-powered

With this strip you can select the desired shade of white from warm white 2700°K to cold white 6500°K, passing through intermediate shades.

The package includes:
5m reel
power cable

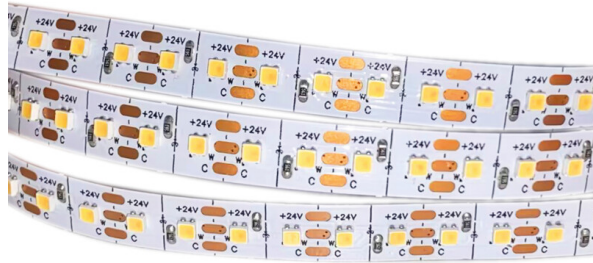

Features

- SMD 2020 LED type - 160 LED/m
- Sectionable: can be cut every 80 LEDs (500mm) and re-powered
- Diffusion angle: 120°
- Minimum cutting section: 6 mm
- Max extendable: 5,000 mm
- Colour rendering: 90
- Protection degree: IP20, for indoor use
- Operating temp.: -20 +45°C
- Storage temp.: 0 +60°C
- Rear adhesive: 3M
- Average life: 36,000 hours
- Operating life: L70B50
- Dimensions: 8x2 mm

Technical data

	Article	Led colour	Colour temp.	Volt	Led type	Led/m	W/M	LM/M	IP
A T G F	FLR.620	bianco dinamico	2700°K - 6500°K	24V	SMD 2020	170	9,6	da 500 a 540	20

ACCESSORIES FOR LED STRIPS
FLR.620PC





ENERG

LYVIALED

FLR.620



3

kWh/1000h



2019/2015