

LED spot light

CODE: JUNO 30W

- Body in powder-coated die-cast aluminium
- Large rear dissipator for efficient heat dissipation
- LED: Array Bridgelux patented
- Anti-glare reflector, high-efficiency, maximises light output
- Silver reflector to optimise the flux
- Mounting bracket with bearing scale
- Rear finning for excellent thermic exchange
- Reduced thickness

IP65






Features

- Operating voltage: 175 ÷ 265V~
- Frequency: 50Hz-60Hz
- Working voltage: DC30-36V
- Waterproof driver
- Power cord L=30 cm type H05RN-F3x1 mm2 - VDE
- LED: C.O.B.
- Colour rendering: >75
- Energy efficiency: >90%
- LED luminous efficiency: 90lm/W
- Luminous efficiency: >85%
- Power factor: >0.90
- LED life: 30000 hours
- Operating temperature: -30°C +50°C
- Protection degree: IP65

Technical data

Article	Dimensions	Body color	Total consumption	Color	Luminous flux	Angle of diffusion	Weight
JN30	347x253x81 mm	black	30 W	white 5.500°K	2.700 lm	120°	2,707 kg
JN30.D	347x253x81 mm	black	30 W	day light 4.000°K	2.500 lm	120°	2,707 kg
JN30.WW	347x253x81 mm	black	30 W	warm white 3.000°K	2.400 lm	120°	2,707 kg

Data sheets

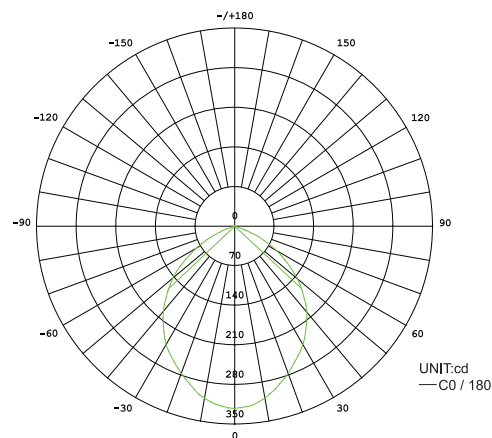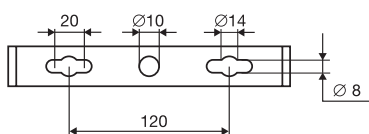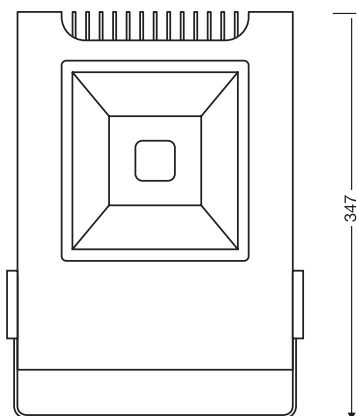

Appliance for outdoor

